

Good study results, better night's sleep

Alice PDx Diagnostic System

The Alice PDx is a portable, diagnostic recording device for OSA screening, follow-up and diagnostic assessment of cardio-respiratory sleep disorders.

The Alice PDx enables you to test your patients outside of the lab without compromising study results, helping you to avoid the costs associated with retesting.

The Alice PDx incorporates our unique Good Study Indicator (GSI).* The GSI is predicated on airflow and oximeter signal quality and displays the amount of "good quality data" needed for a study to be

complete and valid. The indicator measures patient airflow, gathered by the nasal cannula and/or the oral thermistor, airflow from therapy devices, and pulse oximetry, gathered by the SpO₂ sensor. Without either of these signals, the sleep study would be declared diagnostically invalid because of insufficient data.




Optional Equipment

ECG yoke; ExG yoke; ECG and neurological electrodes (for ExG); therapy device communication cable; ventilation device communication cable

Basic PC Recommendations

- Windows-compatible personal computer running Windows Vista Business, Windows XP Professional or 2000 with a CD-RW drive.
- Intel Pentium 3 processor (500 MHz) or greater, 32-bit (x86) processor (1 GHz) required for Windows Vista computers
- 512 MB system memory, 1 GB or higher for Windows Vista computers

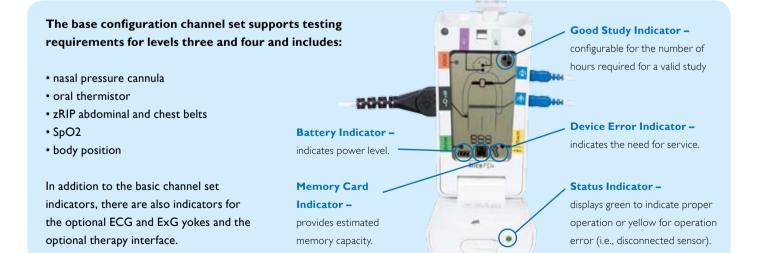



Product specifications

Specifications:

Total Channels: Up to 21 with Optional ECG and ExG Yokes Base Channels:

10 Channels: Pressure-Based Flow (w/snore) and Thermal Airflow, zRIP Effort (2), Body

Position, SpO₂ (also Pleth and Pulse Rate) and Patient Marker. Up to eight parameters from Respironics therapy devices may be

acquired, including pressure, flow and leak.

ECG Yoke; 7 channels: 3-lead ECG providing Optional Yokes/ Channels: 3 measured and 4 derived channels

> ExG Yoke: 7 channels: 4 Neuro Channels (EEG or EOG) and 3 Differential EMG, plus

references and ground

Input Impedance: 10 MOhm per elec. 20 M Ohm differential

2 MOhm per elec. 4 MOhm differential

2 MOhm per elec. 4 MOhm differential

Bandwidth: ECG: 0.318Hz to 81Hz

> EEG: 0.318Hz to 35Hz EMG: 9.7Hz to 86Hz

Input Signal Range: ECG: +/- 4mV

> EEG: +/- 500uV EEG: +/- 150uV

Digital Resolution: Up to 16 bits Initial Sample Rate: Up to 1,000 Hz

Max Storage Rate: 200 Hz for ECG/ExG. 100 Hz for Effort and

Thermal Flow, Pressure Flow 200 Hz, Snore

500 Hz, Body Pos. 1 Hz

Communication

Interfaces:

Serial Protocol USB PC cable, SleepLink and Serial communication cables for

Respironics Therapy devices

System Physical Characteristics:

Alice PDx Unit:

 $5"L \times 3"W \times 2"H$ (12.7 cm x 7.62 cm x 5.08 cm) Size: Weight: Approximately 8 oz (230 grams), (weight

does not include batteries)

System Power: Three AA (1.5V) alkaline batteries, 0.43 watts

Requirements: Alice PDx can support the use of

rechargeable batteries

Ordering Information:

1043844 Alice PDx Device Kit. International

1048415 ExG Yoke, Alice PDx, International 1040810 ECG Yoke, Alice PDx, International

1040806 Alice PDx to SleepLink Cable 1040805 Alice PDx to RS-232 Sleep Therapy Cable

927 3 foot SpO₂ extension cable (Nonin) 936 SpO₂ Reusable Sensor, Adult Finger Clip

953 SpO, Reusable Flex Sensor, Adult

954A Adult Reusable Sensor Wrap (25/pack) P1328-60

Pro-Flow Nasal Canula, Adult (60/pack) P1379 Oral Thermistor, Alice PDx

P1388 Nasal-Oral Thermistor, Alice PDx

P1391 CPAP Titration Kit (for non-Respironics therapy devices)

1031854 Sleepware



© 2008 Koninklijke Philips Electronics N.V. All rights are reserved.

Philips Healthcare reserves the right to make changes in specifications and/ or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Philips Healthcare is part of Royal Philips Electronics

www.philips.com/healthcare healthcare@philips.com fax: +31 40 27 64 887

Printed in the US MCI 4101970 PN 1057476 Philips Healthcare Global Information Center PO Box 1286 5602 BG Eindhoven The Netherlands