




**iM 7** Multi-Parameter Patient Monitor



# iM 7

## Multi-Parameter Patient Monitor

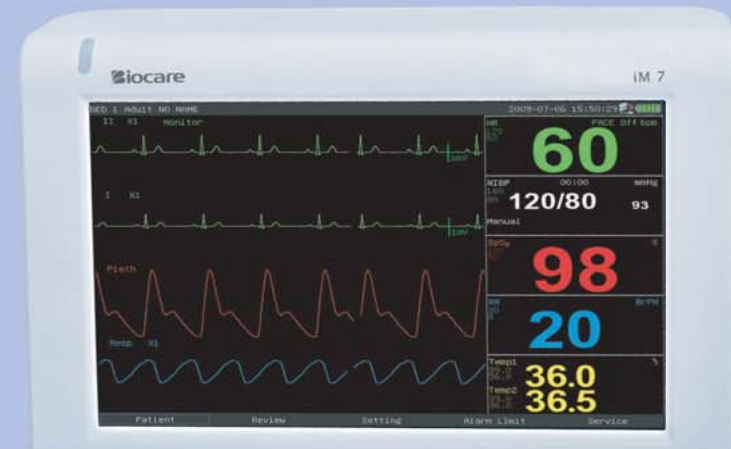

### ⦿ Different Screen Layout



### ⦿ Compact Design



### ⦿ Central Monitoring System



### Features:

- Elegant design small size, much more portable;
- 7 inches high resolution color TFT display;
- Large font display;
- User friendly interface, easy to operate;
- Arrhythmia analysis and S-T segment analysis;
- Static sound design, provide you quite and clean;
- Rechargeable battery up to 4 hours continuous working;
- Networkable with Central Monitoring System.

### Specifications:

#### ECG

Lead Selection: I, II, III, aVR, aVL, aVF, V  
 Gain: 2.5 mm/mV, 5 mm/mV, 10 mm/mV, 20mm/mV  
 Sweep Speed: 12.5mm/s, 25mm/s, 50mm/s  
 Accuracy: ±1%

#### RESP

Measurement Range: 0-150bpm  
 Resolution: 1bpm  
 Accuracy: ±2%

#### SPO2

Range of measurement: 0~100%  
 Resolution: 1%  
 Accuracy: At 70~100%, ±2%  
 Pulse Rate: 20-300bpm  
 Accuracy: ±3bpm

#### TEMP

Measurement Range: 0-50°C  
 Accuracy: ±0.1  
 Resolution: ±0.1

#### NIBP

Method Automatic oscillometry  
 Work Mode: Manual, Automatic, Continuous  
 Measurement range:  
     Adult: 10-280mmHg  
     Child: 10-220mmHg  
     Neonate: 10-135mmHg  
 Resolution: 1 mmHg  
 Dimension: 19mm×5.5mm×14.5mm(L×W×H)  
 Net Weight: 1.2Kg

**Shenzhen Biocare Electronics Co., Ltd.**

Add: Floor 6, Main Building, High-tech Innovation Park Baoan, Shenzhen, 518102, P.R.China

Tel: +86 755 27960641

Fax: +86 755 27960643

E-mail: sales@biocare.com.cn

<http://www.biocare.com.cn>

